

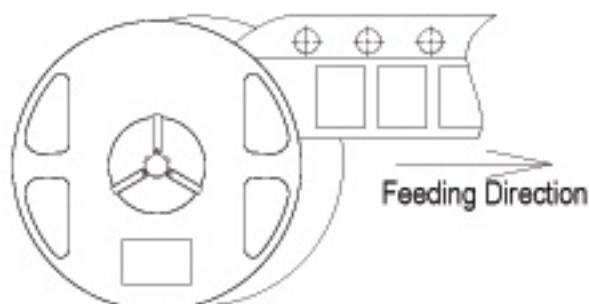
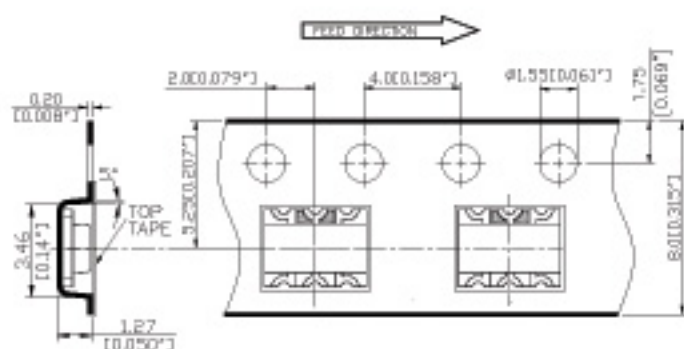


## \* Tape And Reel Of GH-S158 Series

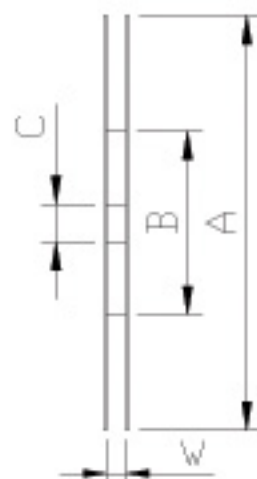

|                                                                                              |            |
|----------------------------------------------------------------------------------------------|------------|
| Dimensions per ANSI/EIA<br>Standard RS-481<br>All dimensions are in<br>Millimeters (inches). |            |
| A                                                                                            | 180[7.09]  |
| B                                                                                            | 60[2.36]   |
| C                                                                                            | 13.5[0.53] |
| W                                                                                            | 8.4[0.33]  |
| Thickness of top cover tape<br>0.1[0.004"] MAX                                               |            |

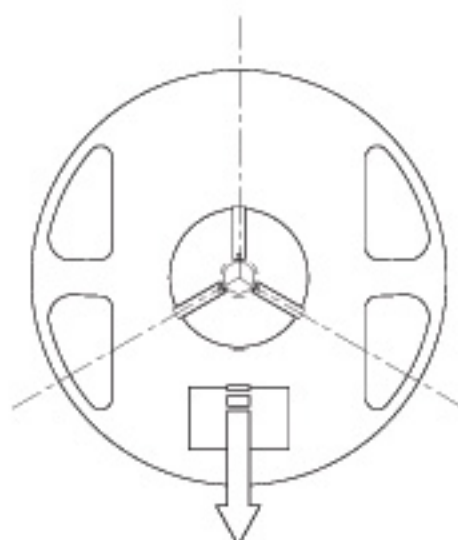

|                                                                                                               |  |
|---------------------------------------------------------------------------------------------------------------|--|
|  GRAND HALO ELECTRONIC LTD |  |
| PART NO.                                                                                                      |  |
| LOT NO.                                                                                                       |  |
| QUANTITY                                                                                                      |  |
| DATE                                                                                                          |  |
| DATA                                                                                                          |  |

### NOTES:

1. Empty component pockets are sealed with top cover tape;
2. Minimum leader length at both ends of the tape is 450 mm;
3. The maximum number of missing lamps is two;
4. The Mark is oriented towards the tape sprocket hole;
5. 2000pcs/Reel.