



3-3


* Tape And Reel Of GH-5168-L1 Multi-Color Series

USER DIRECTION OF FEED

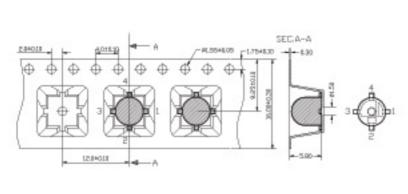



Stand All dir	nsions per ANSI/EIA ard RS-481 nensions are in eters (inches).	
Α	330[13.0]	
N	100[3.93]	
С	13 [0.51]	
T	16.5[0.65]	
	ess of top cover tape 04"] MAX	

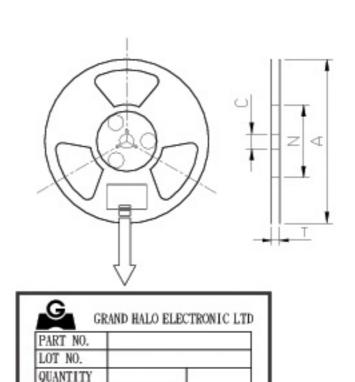

NOTES

1. Empty component pockets are sealed with top cover tape;

DATE DATA

- 2. Minimum leader length at both ends of the tape is 450 mm;
- 3. The maximum number of missing lamps is two;
- 4. The common lead is oriented towards the tape sprocket hole;
- 5. 800pcs/Reel.