



# ★ Tape And Reel Of GH-2033-02 Series

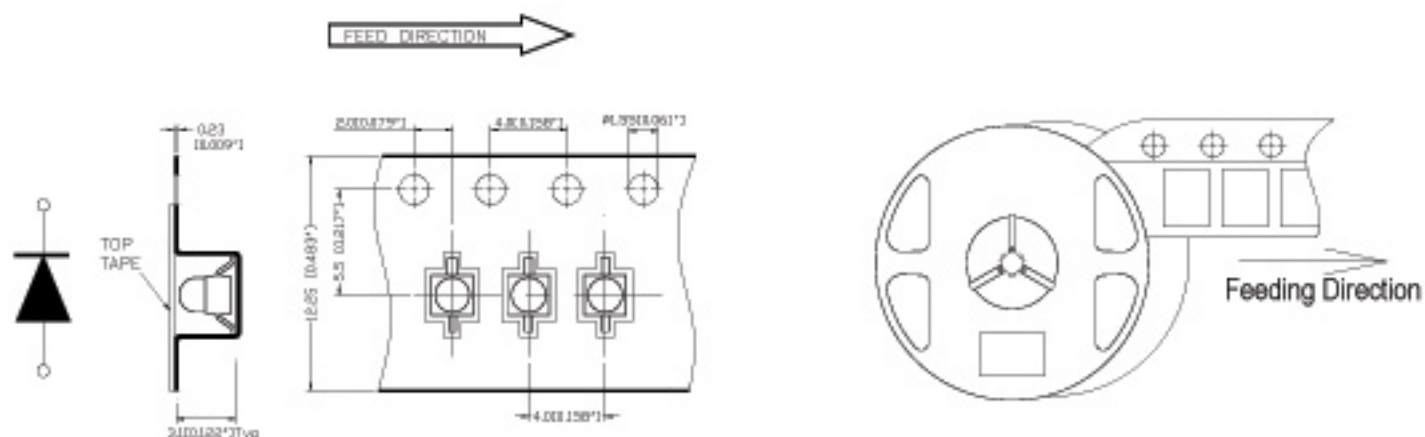

| Dimensions per ANSI/EIA<br>Standard RS-481<br>All dimensions are in<br>Millimeters (inches). |            |
|----------------------------------------------------------------------------------------------|------------|
| A                                                                                            | 180[7.09]  |
| B                                                                                            | 60[2.36]   |
| C                                                                                            | 13.5[0.53] |
| W                                                                                            | 12.5[0.50] |
| Thickness of top cover tape<br>0.1[0.004\"                                                   |            |

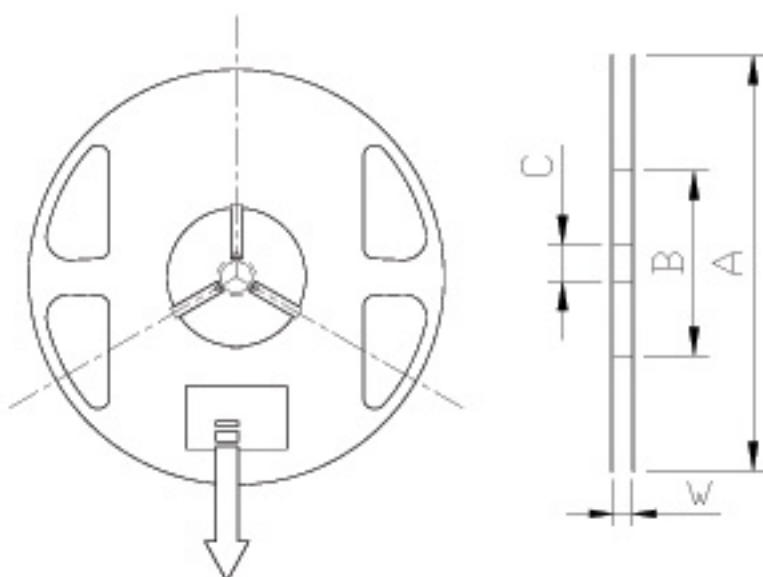

|          |  |
|----------|--|
| PART NO. |  |
| LOT NO.  |  |
| QUANTITY |  |
| DATE     |  |
| DATA     |  |

## NOTES:

1. Empty component pockets are sealed with top cover tape;
2. Minimum leader length at both ends of the tape is 450 mm;
3. The maximum number of missing lamps is two;
4. The cathode is oriented towards the tape sprocket hole.
5. 1000 pcs/Reel